


Shrink Wrap Packaging

- For use in semi-automatic and automatic equipment.
- Food and Non-Food packaging.
- Large stock for fast delivery.
- New green option with OBP film.
- Films are compatible with virtually all machine manufacturers.



REGULAR SHRINK FILM (RSF)

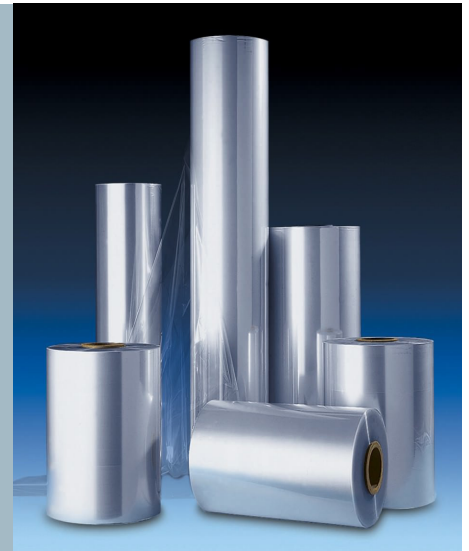

- Ideal option for semi-automatic equipment.
- 5-layer co-extruded polyolefin equals high barrier properties.
- High transparency.
- Bi-directional shrinking.
- Cold-resistant and not susceptible to embrittlement.
- Free of toxin and odor.
- Ideal substitute for PVC film.

HIGH PERFORMANCE FILM (HPF)



- Use in semi-automatic as well as automatic equipment.
- 5-layer co-extruded polyolefin.
- High shrink factor with low shrink force.
- Ideal for irregular shaped or flexible products.
- Low shrink temperature (as low as 220°F).

CROSS-LINKED FILM (XLF)



- Use in semi-automatic as well as automatic equipment.
- Irradiated cross-linked polyolefin.
- High shrink factor and high shrink force.
- High gloss, low haze, high clarity.
- Very strong film for distribution packaging.
- Great option for pharma, food, electronics or general packaging.
- Thinner gauge required when comparing to regular shrink film.

ANTI-FOG FILM (AFX)




- Use in semi-automatic as well as automatic equipment.
- Irradiated cross linked polyolefin.
- Film dedicated for food packaging.
- Safe and approved for direct food contact.
- No fog during chilling.
- High puncture resistance.

NEW BIO-DEGRADABLE POLYOLEFIN (OBP)



- Use in semi-automatic as well as automatic equipment.
- Bio-degradable polyolefin.
- Controlled film life of approx. 2 years (depending on environmental factors).
- No toxic residues or microplastics.
- Low shrink temperature.

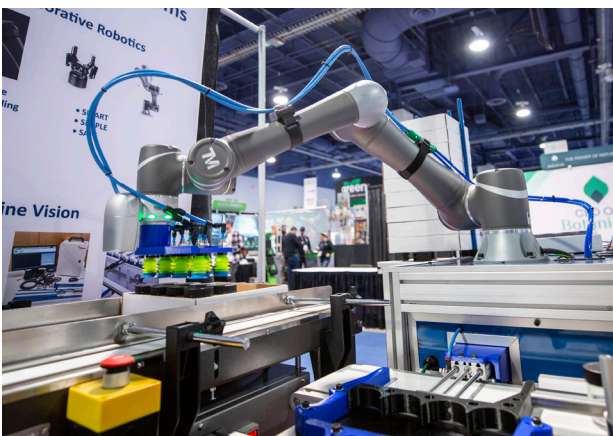


Ask us about our packaging automation solutions!

PRODUCT	GAUGES	STOCK WIDTHS*	MAX. WIDTH	CERTIFICATION
RSF	50-150	8"-24"	52"	FDA & USPS
HPF	50-150	8"-24"	52"	FDA & USPS
XLF	50-100	8"-24"	52"	FDA & USPS
AFX	50-100	8"-24"	52"	FDA & USPS
OBP	50-100	8"-24"	52"	FDA & REACH

* CF=Centerfold, Single-wound available upon request

FILM LENGTH CHART

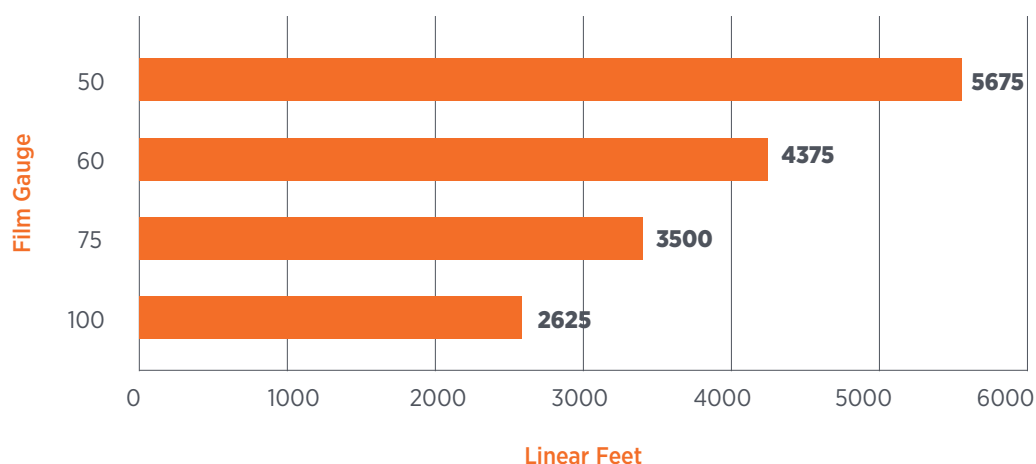

FILM CROSS REFERENCE



- Vanguard CXV
- Quick Shrink-201
- Sytec 307S
- Cryovac MPD
- Cryovac CT-700
- Clysar EHC, CHS
- Exlfilm
- Bollore BX, BY
- Uline Economy
- Intertape HSP
- Opti 110
- Zhongda ZDF01
- Mega Pack. HQ Plus
- Bagla BX-505



- Clysar LTCL
- Clysar LE
- Syfan Sytec MVP
- Zhongda Z101
- Quick Shrink-LF



- Syfan Sytec 701
- Quick Shrink-IR
- Cryovac D940, D955
- Bollore BRX
- Bollore BZN
- Vanguard CCL
- DynaClear RCD
- Exlfimplus
- Uline Deluxe
- Clysar HPG
- Bagla BX-ULTRA




- DynaClear AF
- Cryovac RD-45/106
- Clysar AFG
- Syfan SyFresh AF
- Quick Shrink-AF
- Vanguard CCL-AF
- Bagla BX-ULTRafresh

Flow Wrap Packaging

BOPP Overwrap Film

- Runs on VFFS and HFFS equipment
- Offers wide-seal range and low-seal initiation temperature for high-speed processing
- Features a consistent dyne level suitable for inks and adhesives
- Keep refrigerated items clear with anti-fog version
- Select perforated films to allow for venting of moisture or steam
- Choose clear, white and metallized films for specific applications

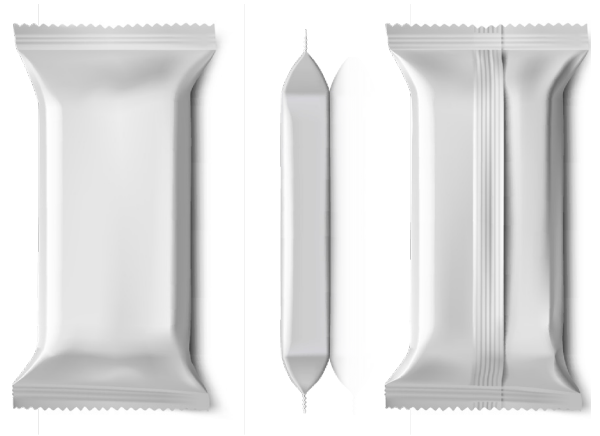

HSCT1-F



A co-extruded two-side heat sealable, biaxially oriented polypropylene film. It is designed for low haze and good gloss, with a broad seal range and good hot tack properties. *Manufactured with materials compliant with FDA regulations.*

- Broad heat seal range
- Good hot tack properties
- Low haze, good gloss
- Good moisture barrier
- Treated on one side for print adhesion



Envision your product like this!

HS2AF-F



A co-extruded two-side heat sealable, biaxially oriented polypropylene film with anti-fog functionality. *Manufactured with materials compliant with FDA regulations.*

- Excellent anti-fog properties
- High seal strength and good hot tack
- Good optical properties
- Treated on one side for print adhesion

FLOW WRAP PACKAGING PERFECT FOR:

FOOD

- Bakery overwrap
- Bottle labels
- Bread bag windows
- Candy
- Chips and snacks
- Fresh produce
- Ice cream
- Pasta

NON-FOOD

- Multi-pack products
- Face masks
- Medical tools
- Distribution packaging
- Your product here

PRODUCT	GAUGES	WIDTHS	CERTIFICATION
HSCT1-F	60, 70, 80, 90, 100, 120, 140, 160, 200*	8"-16"	FDA
	* Standard gauge = 120		
HS2AF-F	80, 100, 120, 140*	8"-16"	FDA
	* Standard gauge = 120		

FILM LENGTH CHART

(8.85" roll diameter, 3.5" core)

